


14gx85 Tek Screw @ 300 centers  
joining boundary joists

Cap flashing all 3 sides on timber  
parker to fall  
25mm THK H3.2 treated timber  
decking

H3.2 Treated Timber Joist

Adjustable Height Pedestal  
(DPH200 with slope  
correctors,height range  
45mm-63mm)

Nuraply 3PM Double Layer  
Membrane System

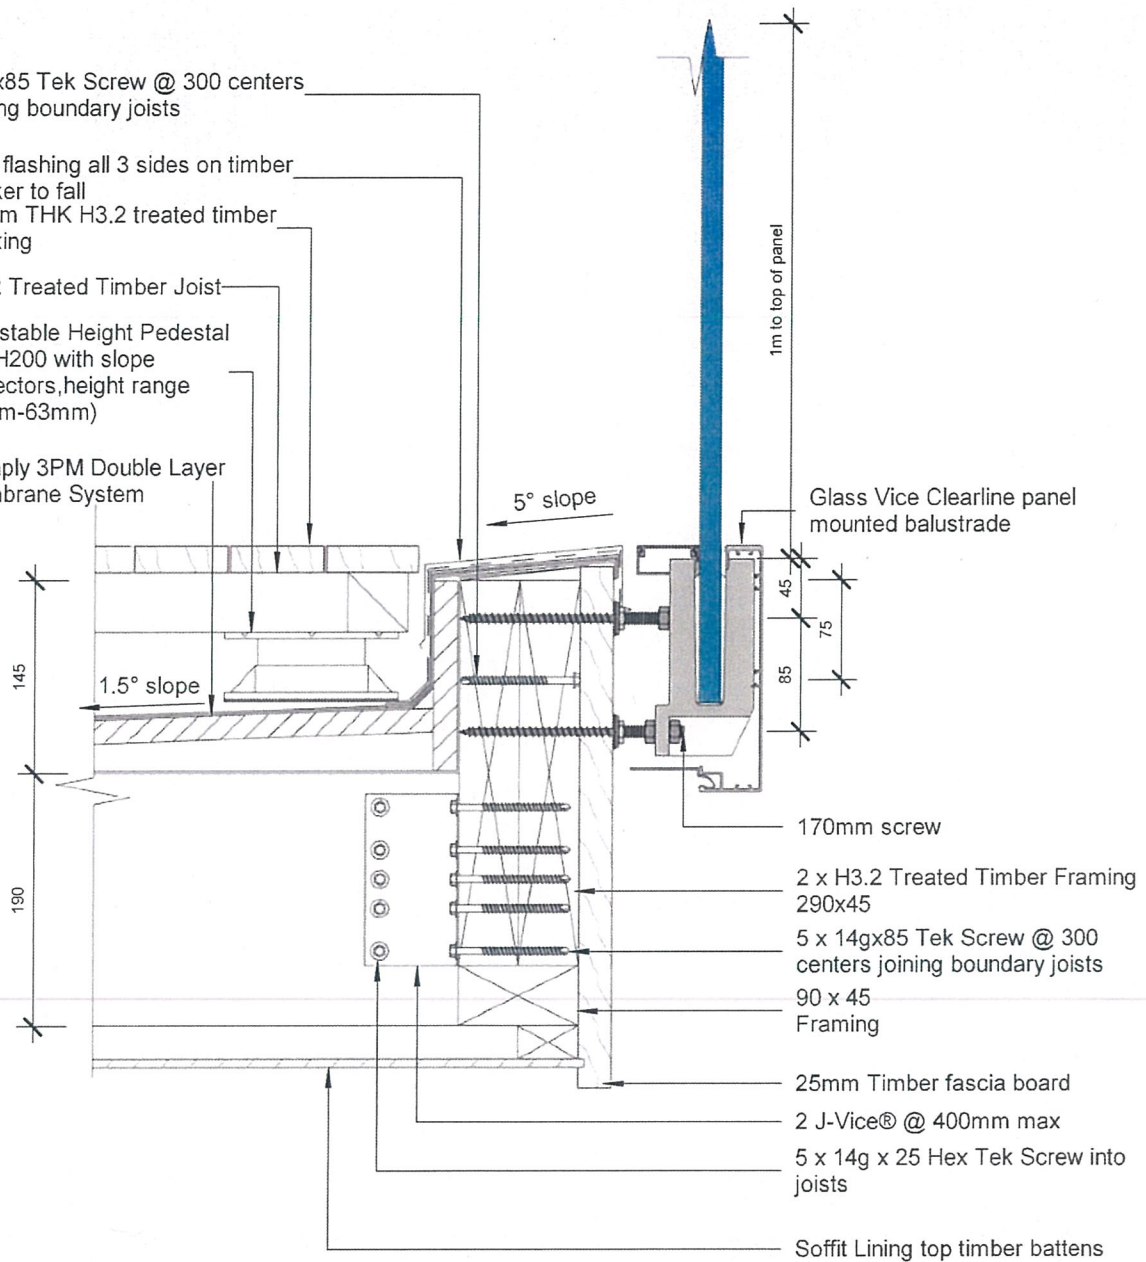

Glass Vice Clearline panel  
mounted balustrade

170mm screw

2 x H3.2 Treated Timber Framing  
290x45

5 x 14gx85 Tek Screw @ 300  
centers joining boundary joists  
90 x 45  
Framing

25mm Timber fascia board

2 J-Vice® @ 400mm max

5 x 14g x 25 Hex Tek Screw into  
joists

Soffit Lining top timber battens

© 2018. The copyright of this document is the property of Glass Vice Limited and shall not be reproduced, copied, loaned or disposed of directly or indirectly, nor used for any purpose other than that for which it is specifically furnished without prior consent.

All dimensions in millimetres



**GlassVice®**  
**Clearline®**

Deck Nib Connection

Date: 14 September 2018 [www.glassvice.com](http://www.glassvice.com)  
Scale: 1 : 5 Phone +64 9 414 6565  
info@glassvice.com

Issue 4

Quick Code:

**GV TT06**